



MORTIER RAPIDE

NON-SHRINK GROUT

KEY BENEFITS

- No shrinkage
- No crack
- Fast setting: 10min

DESCRIPTION

Non-shrink grout: anchors, hinges, guardrail etc.

Fixing doorframes, window frames and setting of columns on concrete, mortar, stones etc.

Small repairs (holes, small cracks)

Fast setting: 10 minutes

Destination: floor & wall, indoor and outdoor

METHOD OF USE

The substrate must be clean, dry, solid, free from grease and loose parts. It must be moistened without dripping.

Mixing ratio: 25kg bag with 4L of clean water

In a clean container, pour the clear water first then gradually add the mortar according to the quantities indicated. Mix manually with a trowel or with an electric mixer until the obtention of a homogeneous paste without lumps. Apply immediately.

Apply 10 to 40 mm thick directly to the humidified substrate with a trowel.

After the start of the setting (10 minutes at 20 ° C), do not readjust the sealed object.

Time of use of the mixture: 5min

Setting time: 10min

Very good resistance achieved after 4 hours.


Drying time: 24h

Bostik SA
La Plaine Saint-Denis, France
Phone : +33 (0)1 55 99 90 00
Fax : +33 (0)1 55 99 90 01
www.bostik.fr

Bostik Ltd.
Stafford, UK
Phone : +44 (0) 1785 27 27 27
Fax: +44 (0) 1785 22 26 65
www.bostik.co.uk

Bostik GmbH
Borgholzhausen, Germany
Phone: +49 (0)54 25/801140
Fax: +49 (0)54 25/801140
www.bostik.de

Bostik B.V
'S-Hertogenbosch, The Netherlands
Phone: +31 (0)7 36 244 244
Fax: +31 (0)7 36 244 344
www.bostik.nl

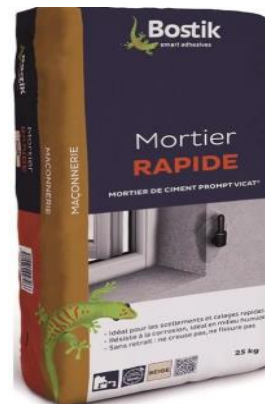

Optimum mechanical performances: after 28 days

Application temperature: 5°C – 30°C

Do not use this product on a plaster base.
Do not perform work in the rain or in direct sunlight.

COVERAGE

20 kg/sqm/cm

CLEANING

Mortier Rapide can be cleaned with water.

STORAGE

Mortier Rapide can be kept 9 months stored in originally closed container at temperatures between 5 and 30°C. Protect from humidity and freezing.

PACKAGING

CODE	UC	PCB	GENCODE
30125091	5k bag	4	3549210027942
30125092	10kg bag	2	3549210027959
30125093	25kg bag	1	3549210027966
30602264	1,5kg carton	6	3549210027935

FURTHER INFORMATION

The following publication is available on request: Material Safety Data Sheets (MSDS)

The information given and recommendations made herein are based on Bostik's research only and are not guaranteed to be accurate. The performance of the product, its shelf life, and application characteristics will depend on many variables, including the kind of materials to which the product will be applied, the environment in which the product is stored or applied, and the equipment used for application. Any change in any of these variables can affect the product's performance. It is the buyer's obligation, prior to using the product, to test the suitability of the product for an intended use under the conditions that will exist at the time of the intended use. Bostik does not warrant the product's suitability for any particular application. The product is sold pursuant to Bostik's Terms and Conditions of Sale that accompanies the product at the time of sale. Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute permission, inducement, or recommendation to practice any invention covered by any patent, without authority from the owner of the patent.

SMART HELP

Please contact your local representative



Bostik SA
La Plaine Saint-Denis, France
Phone : +33 (0)1 55 99 90 00
Fax : +33 (0)1 55 99 90 01
www.bostik.fr

Bostik Ltd.
Stafford, UK
Phone : +44 (0) 1785 27 27 27
Fax: +44 (0) 1785 22 26 65
www.bostik.co.uk

Bostik GmbH
Borgholzhausen, Germany
Phone: +49 (0)54 25/801140
Fax: +49 (0)54 25/801140
www.bostik.de

Bostik B.V
'S-Hertogenbosch, The Netherlands
Phone: +31 (0)7 36 244 244
Fax: +31 (0)7 36 244 344
www.bostik.nl